


# CVT-765

capacitor voltage transformer tester



Vanguard Instruments Company, Inc.  
www.vanguard-instruments.com

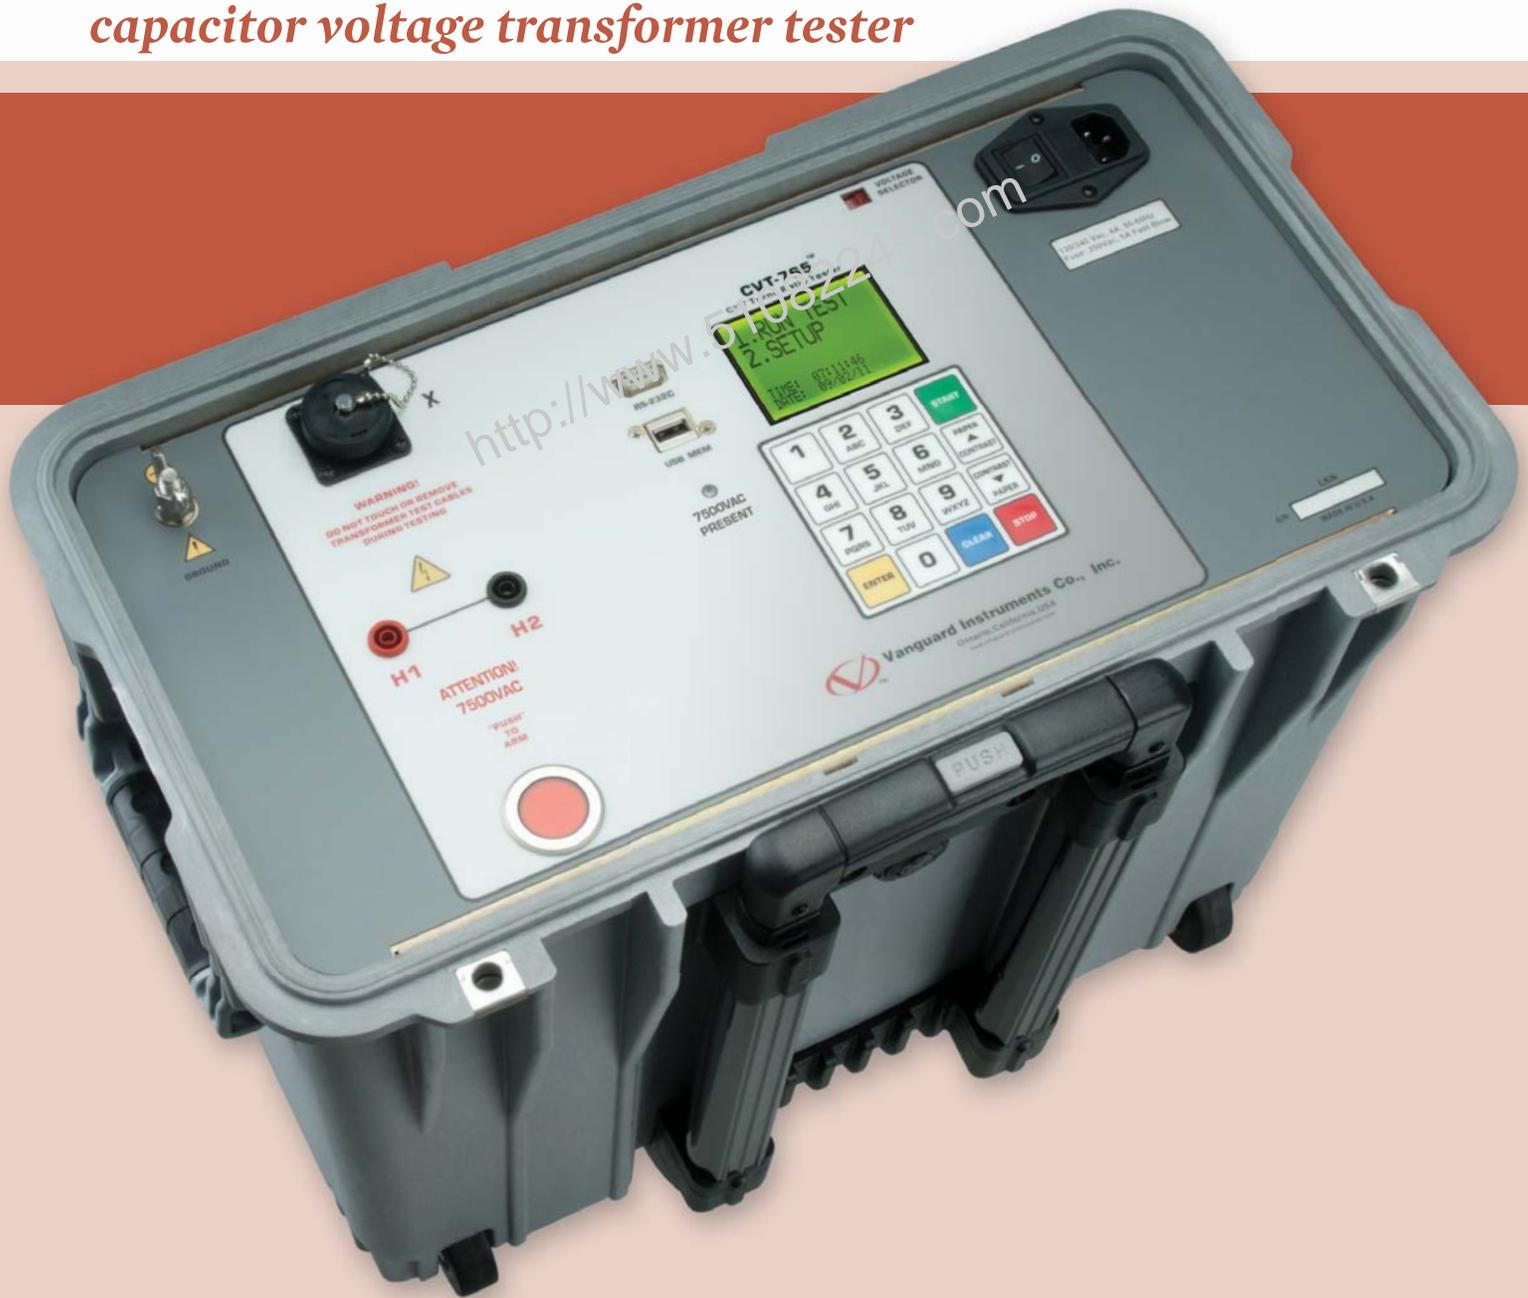


# CVT-765

## capacitor voltage transformer tester

The Vanguard CVT-765 is a microprocessor-based, single phase, automatic, transformer turns-ratio tester. This portable test unit is specifically designed to measure the turns-ratios of Capacitor Voltage Transformers (CVT's).

The CVT-765 determines the transformer turns-ratio using the IEEE C57.12.90 measuring method. It uses a 7500Vac excitation voltage source to accurately measure the turns-ratio of Capacitor Voltage Transformers with a rating of up to 765KV. The transformer turns-ratio is determined by precisely measuring the voltages across the unloaded transformer windings.

### CVT-765 connections

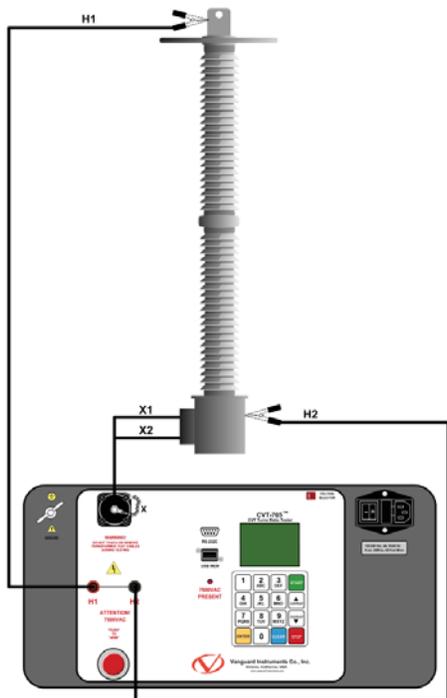

The CVT-765 can measure the turns-ratios of Capacitor Voltage Transformers ranging from 75 to 15,000. The measured turns-ratio, winding polarity, and winding phase angle are displayed on the unit's LCD screen.

A transformer's nameplate voltages can also be entered, and the CVT-765 will display the turns-ratio percentage error by comparing the test results with the nameplate voltage values. This convenient feature eliminates any user calculation errors when testing transformers.

### User Interface

The CVT-765 features a back-lit LCD (128 x 64 pixels) screen that is viewable in bright sunlight and low-light conditions. A rugged 16-key membrane keypad is used to enter test information and to operate the unit.

### Test Record Storage

The CVT-765 can store 128 records of 33 readings internally, and up to 999 test records on an external USB Flash drive. Test records can be recalled using the included Transformer Analysis PC Software.

### Computer Interface

Windows®-based Transformer Analysis software is provided with each unit. Using this software, the user can retrieve test records from the CVT-765 via the RS-232C interface or by using a USB Flash drive, analyze test results, and print test results on a desktop printer. Test results are automatically exported to PDF, EXCEL, and XML formats.

### Operating Voltages

The CVT-765 can be operated from 100 – 120 Vac or 220 – 240 Vac. The proper voltage can be set using the voltage selection switch on the front panel.

### outstanding features


- Can test CVT's rated up to 765 KV
- Displays turns ratios from 75 – 15,000
- Calculates turns ratio percentage error when nameplate voltages are provided
- Displays winding polarity and phase angle

## ordering information

Part number **CVT-765**

CVT-765 with test cables

# CVT-765 Controls & Indicators

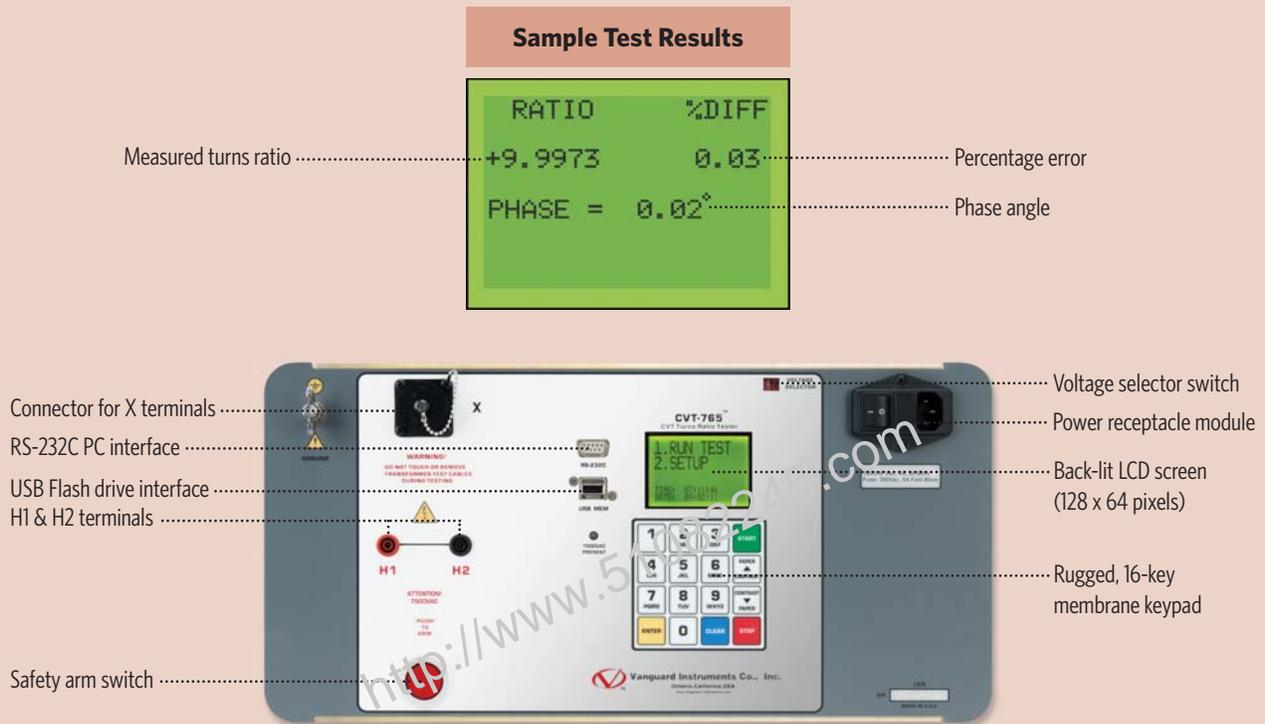

## CVT-765 specifications

<b>type</b>	Portable, automatic, CVT turns-ratio tester
<b>physical specifications</b>	19.5"W x 12"H x 17" D (49.5 cm x 30.5 cm x 43.2 cm); 65 lbs. (29.5 Kg)
<b>input power</b>	100 – 120 Vac or 220 – 240 Vac (selectable), 50/60 hz
<b>measuring method</b>	ANSI/IEEE C57.12.90
<b>ratio measuring range</b>	75 – 15,000 (5 digit resolution)
<b>turns ratio accuracy</b>	75 – 4,999: ±0.25%, 5,000 – 9,999: ±0.35%, 10,000 – 15,000: ±0.5%
<b>phase angle measurement</b>	0 – 360 degrees, ±0.2 degree accuracy
<b>polarity reading</b>	In-Phase or Out of Phase indication
<b>test voltage</b>	7440 Vac @ 50ma
<b>display</b>	Back-lit LCD (128 x 64 pixels), viewable in direct sunlight and low light levels
<b>computer interface</b>	One RS-232C PC interface, one USB Flash drive interface
<b>pc software</b>	Windows®-based Transformer Analysis Software (included with purchase)
<b>internal test record storage</b>	128 records; each record can contain up to 33 readings
<b>external test record storage</b>	Up to 999 test records on external USB Flash drive
<b>safety</b>	Designed to meet IEC 61010A-1 and CAN/CSA C22.2 No. 1010.1-92 Standards
<b>environment</b>	Operating: -10°C to +50°C (+15°F to +122°F); Storage: -30°C to +70°C (-22°F to +158°F)
<b>humidity</b>	90% RH @ 40°C (104°F) non-condensing
<b>altitude</b>	2,000 m (6,562 ft) to full safety specifications
<b>cables</b>	one 50 ft. H cable, one 15 ft. X cable, one power cable, one safety ground cable
<b>warranty</b>	one year on parts and labor

**NOTE :** the above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.



<http://www.51982245.com>

## Instruments designed and developed by the hearts and minds of utility electricians around the world

Vanguard Instruments Company, (VIC), was founded in 1991. Currently, our 28,000 square-foot facility houses Administration, Design & Engineering, and Manufacturing operations. From its inception, VIC's vision was, and is to develop and manufacture innovative test equipment for use in testing substation EHV circuit breakers and other electrical apparatus.

The first VIC product was a computerized circuitbreaker analyzer, which was a resounding success. It became the forerunner of an entire series of circuitbreaker test equipment. Since its beginning, VIC's product line has expanded to include microcomputer-based, precision micro-ohmmeters, single and three phase transformer winding turns-ratio testers, transformer winding-resistance meters, mega-ohm resistance meters, and a variety of other electrical utility maintenance support products.

VIC's performance-oriented products are well suited for the utility industry. They are rugged, reliable, accurate, user friendly, and most are computer controlled. Computer control, with innovative programming, provides many automated testing functions. VIC's instruments eliminate tedious and time-consuming operations, while providing fast, complex, test-result calculations. Errors are reduced and the need to memorize long sequences of procedural steps is eliminated. Every VIC instrument is competitively priced and is covered by a liberal warranty.



### **Vanguard Instruments Company, Inc.**

1520 S. Hellman Avenue • Ontario, California 91761, USA  
**Phone** 909-923-9390 • **Fax** 909-923-9391  
[www.vanguard-instruments.com](http://www.vanguard-instruments.com)